


Sealing Films

Efficient protection against evaporation
and contamination

BRAND. For lab. For life.®


- + Protect your samples against evaporation and contamination
- + For PCR, cell culture, automation and many other applications
- + For all plates in ANSI/SLAS format

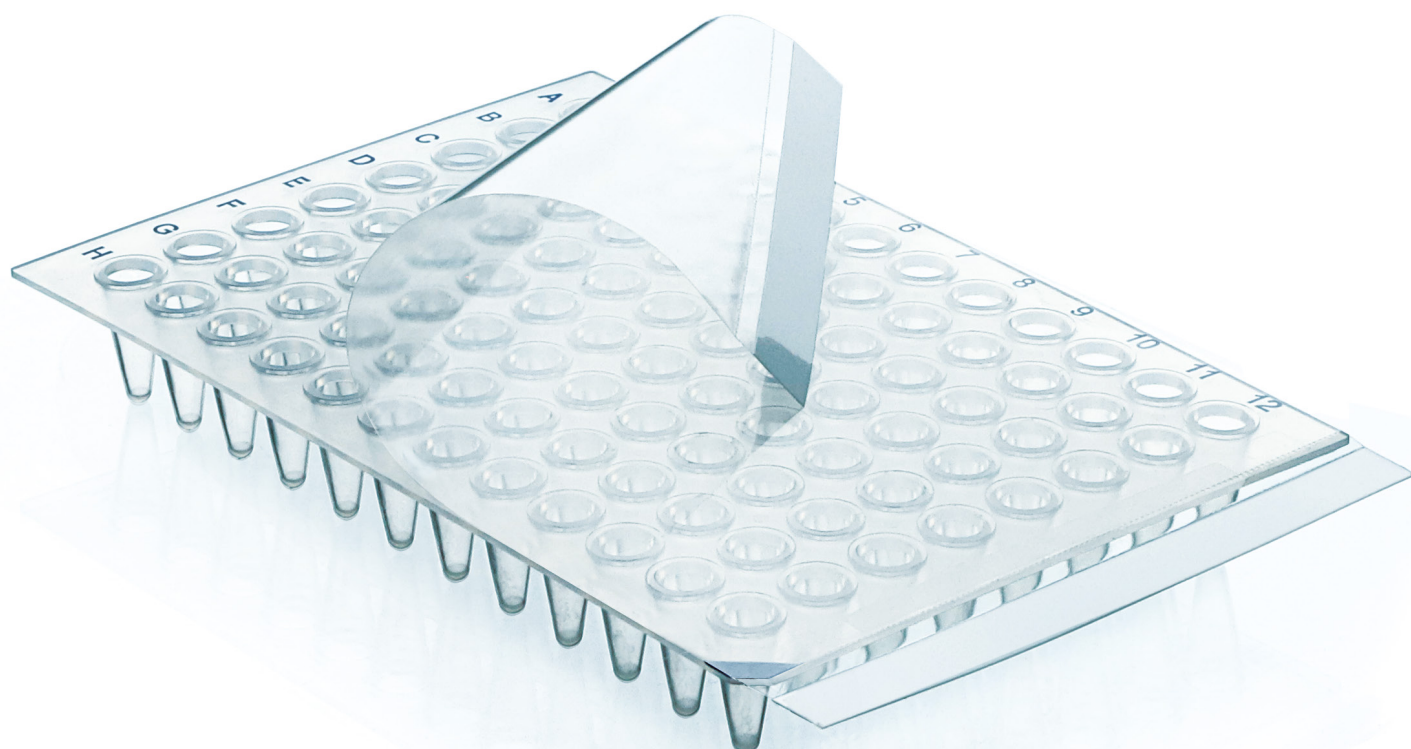

Overview: advantages


With self-adhesive sealing films from BRAND, you can cover your samples and securely seal them. BRAND offers a wide range of easy-to-handle sealing films with application-specific features, so you can rely on your samples being protected in any application.

Selecting the right sealing film for your application improves your workflow efficiency and the quality of the results. Film properties such as transparency or pierceability provide optimal support for your specific application. The secure seal prevents contamination to ensure reliable results, while also reducing costs due to minimized evaporation.

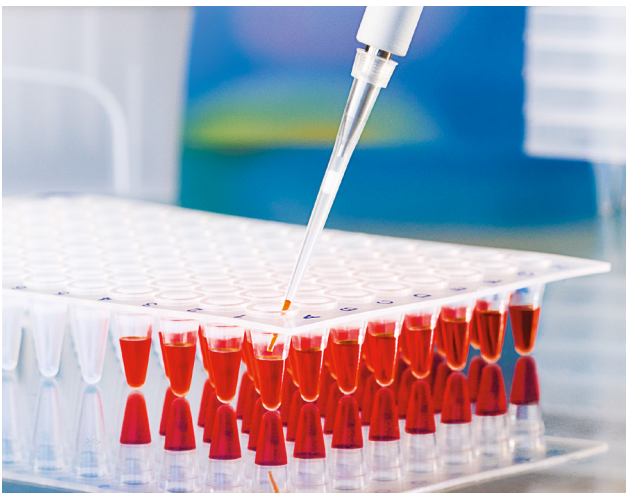

- + Easy to apply and remove without expensive equipment
- + Reliable adhesion for optimum protection and minimized evaporation loss
- + Light-blocking films for protection of light-sensitive samples
- + Highly-transparent films for optimal measurement results
- + Gas-permeable films for cell and tissue cultures
- + Black and white films for sensitive fluorescence and luminescence measurements

The right film for your application

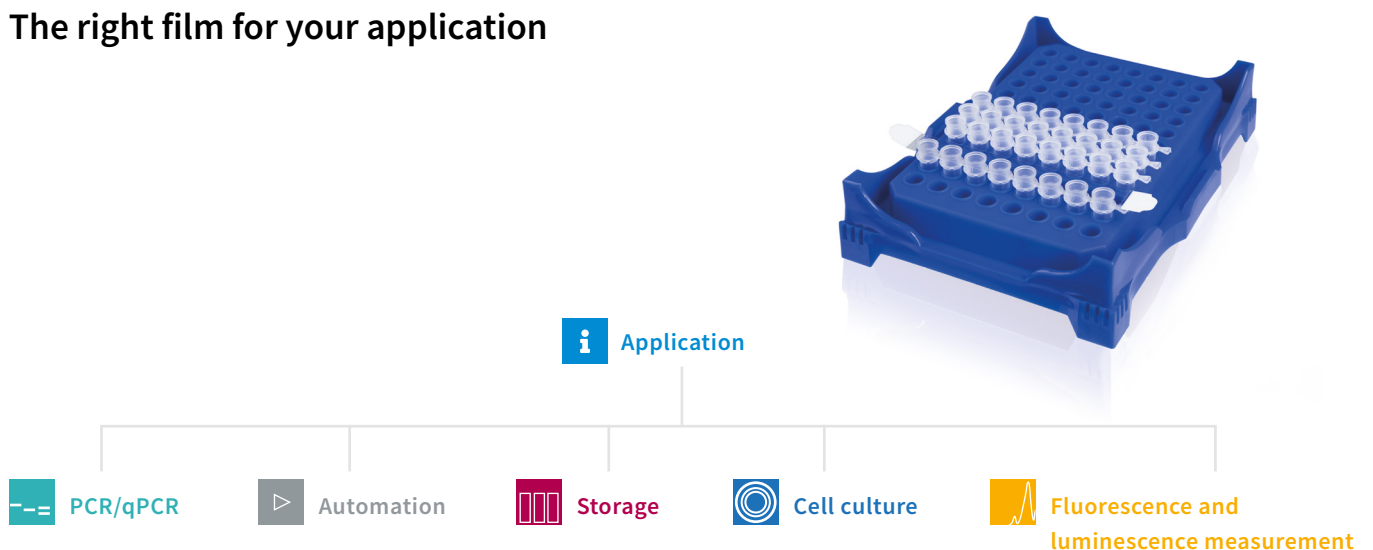

Protecting your samples is a high priority. In addition to preventing contamination and evaporation loss, sealing films provide optimal support for your application and enable

you to achieve excellent results. The more clearly you define your application, the easier it is to select the right sealing film.

Sealing films for PCR and qPCR

Whether standard PCR, qPCR or digital droplet PCR, the source material is always valuable and the volume always low. To protect samples and maintain their sensitivity at the same time, PCR samples must be perfectly sealed.

Requirements for PCR/qPCR sealing films:

- + Temperature stability over 120 °C
- + Tight seal for minimizing evaporation
- + Highly transparent for use in qPCR methods




qPCR film

This film is suitable for real-time PCR, ELISA and other colorimetric applications. The film is highly transparent and has minimal autofluorescence. In addition, film 781391 can be easily repositioned for a perfect seal thanks to pressure-sensitive adhesive beads which are only activated when pressure is applied.

Description	Material	Pack of	Cat. No.
Film	Polyester	100 pcs	781391
Film strips	Polyester	400 pcs (50 sheets of 8 strips)	781383

PCR film

This film is suitable for PCR, ELISA, EIA and other optical applications. It is transparent, enabling visual inspection of samples. Two tabs make it easy to handle, and the strong adhesive minimizes evaporation, while ensuring that the film remains securely in place on all plate types.

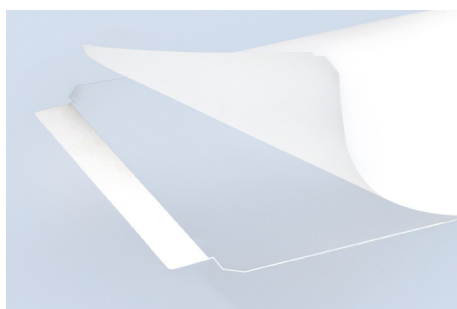

Description	Material	Pack of	Cat. No.
Film	Polyester	100 pcs	781390

Film for PCR and storage

This film is ideal for PCR, ELISA and sample storage. Due to its special adhesive, it is usable in temperatures down to -80 °C and is DMSO and solvent resistant. Transparency ensures optimal conditions for visual inspection. It can be removed without leaving residues.




Description	Material	Pack of	Cat. No.
Film	Polypropylene	100 pcs	701367

Sealing films for automation processes

Due to the increasing number of diagnostic methods, the number of samples processed is growing steadily. This means that high-throughput analyses are gaining significance. In these automated processes, the films must not only protect the samples, but also comply with the mechanical requirements of automation.

Sealing film requirements for automation:


- + Pierceability
- + Adhesive-free zones for contamination-free tasks
- + Tight seal for minimizing evaporation

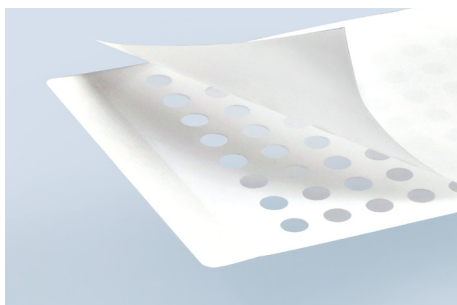

Film with adhesive-free zones

In high-throughput and automation applications, this film protects your samples against impurities, while the adhesive-free zones protect against contamination with adhesive. Pipettes and automation systems are able to pierce through it easily, and it is highly resistant against chemicals.


Description	Material	Pack of	Cat. No.
Film	Polyethylene/ Polypropylene	50 pcs	701370

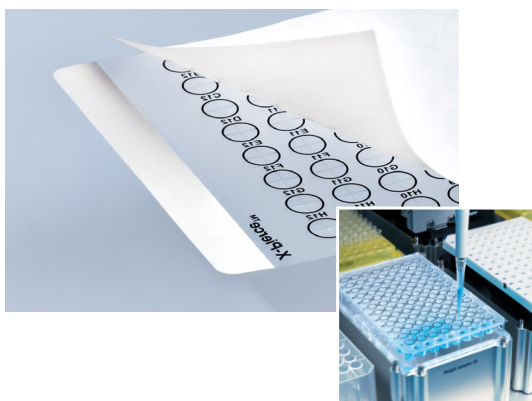

Pre-punched film

The well openings on this film are pre-punched for repeated sampling in automation processes. The four flaps can easily be pressed open by an automation probe or pipette tip and returned to their original closed position after sampling. This protects the samples against evaporation and contamination. Samples can be safely identified thanks to the alphanumeric coding.

Description	Material	Pack of	Cat. No.
Film	Vinyl	100 pcs	701374

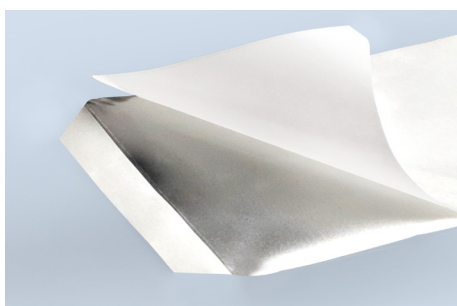

Aluminum film

This film can be easily pierced by single- and multi-channel pipettes and in automation systems. Thanks to a special adhesive, it is DMSO-resistant and extremely resistant to solvents. The film is impervious to light, in order to protect light-sensitive samples.

Description	Material	Pack of	Cat. No.
Film	Aluminum	100 pcs	781381

Sealing films for long-term storage

Evaporation and contamination can make samples unusable, especially when stored for long periods. In order to protect the samples and store them so that they are easily accessible, the right sealing film must be used.


Requirements for films used for storage:

- + Temperature stability down to -80 °C
- + Tight seal for minimizing evaporation
- + Pierceability or residue-free removal for easier sample accessibility



Laboratory storage


Short-term storage	Medium-term storage	Long-term storage
<ul style="list-style-type: none"> + While working + For incubation 	<ul style="list-style-type: none"> + Overnight or for several days + From 4 °C to room temperature 	<ul style="list-style-type: none"> + Several weeks or months + At -80 °C

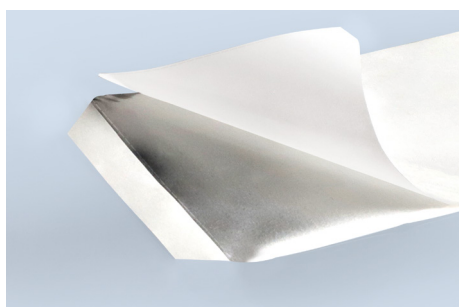

Film for cold storage

Aluminum film is suitable for storing samples at temperatures down to -80 °C. Thanks to its strong adhesive, it is DMSO-resistant and extremely resistant to solvents. The film protects your samples from light and can be easily pierced by pipettes and automation systems.

Description	Material	Pack of	Cat. No.
Film	Aluminum	100 pcs	781381
Foil strips	Aluminum	300 pcs (50 sheets of 6 strips)	781382

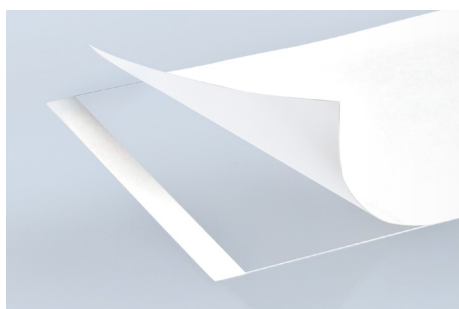

Film for PCR and storage

This film is highly transparent, making it ideal for visual inspections. It is temperature stable down to -80 °C, and due to its strong adhesive, it is resistant to DMSO and other solvents. The film can be removed without leaving any residues and subsequently reapplied.


Description	Material	Pack of	Cat. No.
Film	Polypropylene	100 pcs	701367

Sealing films for cell and tissue cultures

When handling cell and tissue cultures, a secure seal alone is not enough to protect against contamination and transporting. Even gas exchange is just as important. A lack of oxygen or too much carbon dioxide can lead to inaccurate results or even cause the cells to die. Therefore, films for cell and tissue cultures are subject to special requirements.

Requirements of films for cell and tissue cultures:

- + Air permeable for optimum oxygen supply
- + Secure seal against contamination
- + Pierceability for easy sample extraction

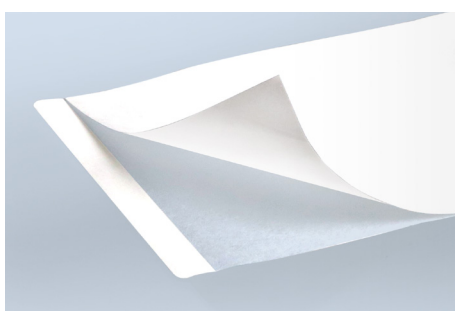

Air-permeable film

This film supports cell and tissue culture applications due to its non-cytotoxic adhesive. It is available in sterile and non-sterile versions and provides optimal contamination protection with high breathability. Uniform porosity ensures even evaporation.


Description	Material	Pack of	Cat. No.
Film	Rayon, non-sterile	100 pcs	701364
Film	Rayon, sterile	50 pcs	701365

Sealing films for fluorescence/ luminescence measurement

White and black films provide support for fluorescence and luminescence measurements and for microscopy. Weak signals are amplified and interference of light from outside is minimized.

Requirements of films for fluorescence/luminescence measurement:


- + Black, light-absorbing film for optimal fluorescence measurement
- + White, light-reflecting film for amplified luminescent signal
- + Temperature stable down to -40 °C

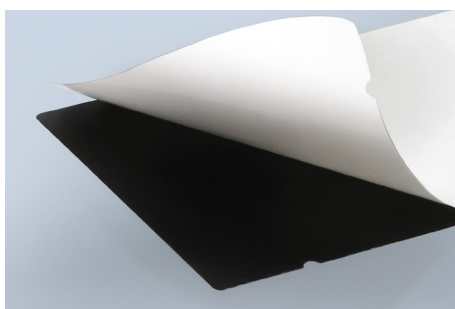

Film for fluorescence measurement

The black, light-absorbing film improves fluorescence measurement results. It can be attached to the top or bottom of the plate and minimizes the interference of light from outside. Sectioned backing paper assists with application.

Description	Material	Pack of	Cat. No.
Film	Vinyl, black	50 pcs	701371

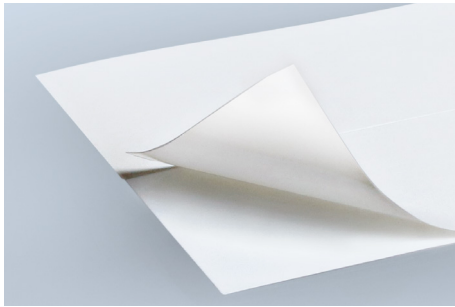

Film for luminescence measurement

This white film can be attached to the top or bottom of the plate for optimized light absorption during luminescence measurements. It significantly increases the sensitivity of the measurement. Thanks to the sectioned backing paper, it is easy to apply.

Description	Material	Pack of	Cat. No.
Film	Vinyl, white	50 pcs	701372

Accessories



Sealing paddle
















The sealing paddle helps to apply self-adhesive films. Thanks to its streamlined sides and rounded shape, it rests comfortably in your hand and ensures optimal force transfer.

Description	Pack of	Cat. No.
Sealing paddle	1 pc	701381



Further information about all compatible PCR plates as well as other PCR products are available on our website www.brand.de/pcr.

Overview

	Applications	Material	Min. temp. in °C	Max. temp. in °C	Pierceable	DNA-, DNase-, RNase-free	Sterile	Pack of	Cat. No.
	qPCR, ELISA, colorimetric applications	Polyester	-40	110		✓		100 pcs	781391
 	qPCR, PCR and storage (film strips)	Polyester	-40	120		✓		400 pcs (50 sheets of 8 strips)	781383
	PCR, ELISA, EIA and other optical applications	Polyester	-40	120		✓		100 pcs	781390
 	PCR, ELISA, other optical applications and storage	Polypropylene	-80	120				100 pcs	701367
 	PCR and storage (film strips)	Aluminum	-80	120	✓	✓		300 pcs (50 sheets of 6 strips)	781382
 	Cold storage, light protection and automation	Aluminum	-80	120	✓	✓		100 pcs	781381
	Automation	Polyethylene/ Polypropylene	-40	90	✓			50 pcs	701370
	Automation	Vinyl	-40	90	✓	✓		100 pcs	701374
	Cell/Tissue culture	Rayon	-20	80				100 pcs	701364
	Cell/Tissue culture	Rayon	-20	80			✓	50 pcs	701365
 	Fluorescence measurement, storage	Vinyl, black	-40	80				50 pcs	701371
	Luminescence measurement, microscopy	Vinyl, white	-40	80				50 pcs	701372



PCR/qPCR



Automation



Storage



Cell culture



Fluorescence and luminescence measurement

BRAND®, BRAND. For lab. For life.® as well as the BRAND figurative mark are registered trademarks or trademarks of BRAND GMBH + CO KG, Germany. All other trademarks mentioned or depicted here are the property of the respective owners.

Our technical literature is intended to inform and advise our customers. However, the validity of general empirical values, and of results obtained under test conditions, for specific applications depends on many factors beyond our con-

trol. Please appreciate, therefore, that no claims can be derived from our advice. The user is responsible for checking the appropriateness of the product for any particular application.

California Residents: For more information concerning California Proposition 65, please refer to www.brand.de/calprop65

Subject to technical modification without notice. Errors excepted.

BRAND GMBH + CO KG

P.O. Box 11 55 | 97861 Wertheim | Germany

T +49 9342 808 0 | F +49 9342 808 98000 | info@brand.de | www.brand.de

BRAND. For lab. For life.®

